




P1: M-003
 P2,P3: M-005
 P4: M-008

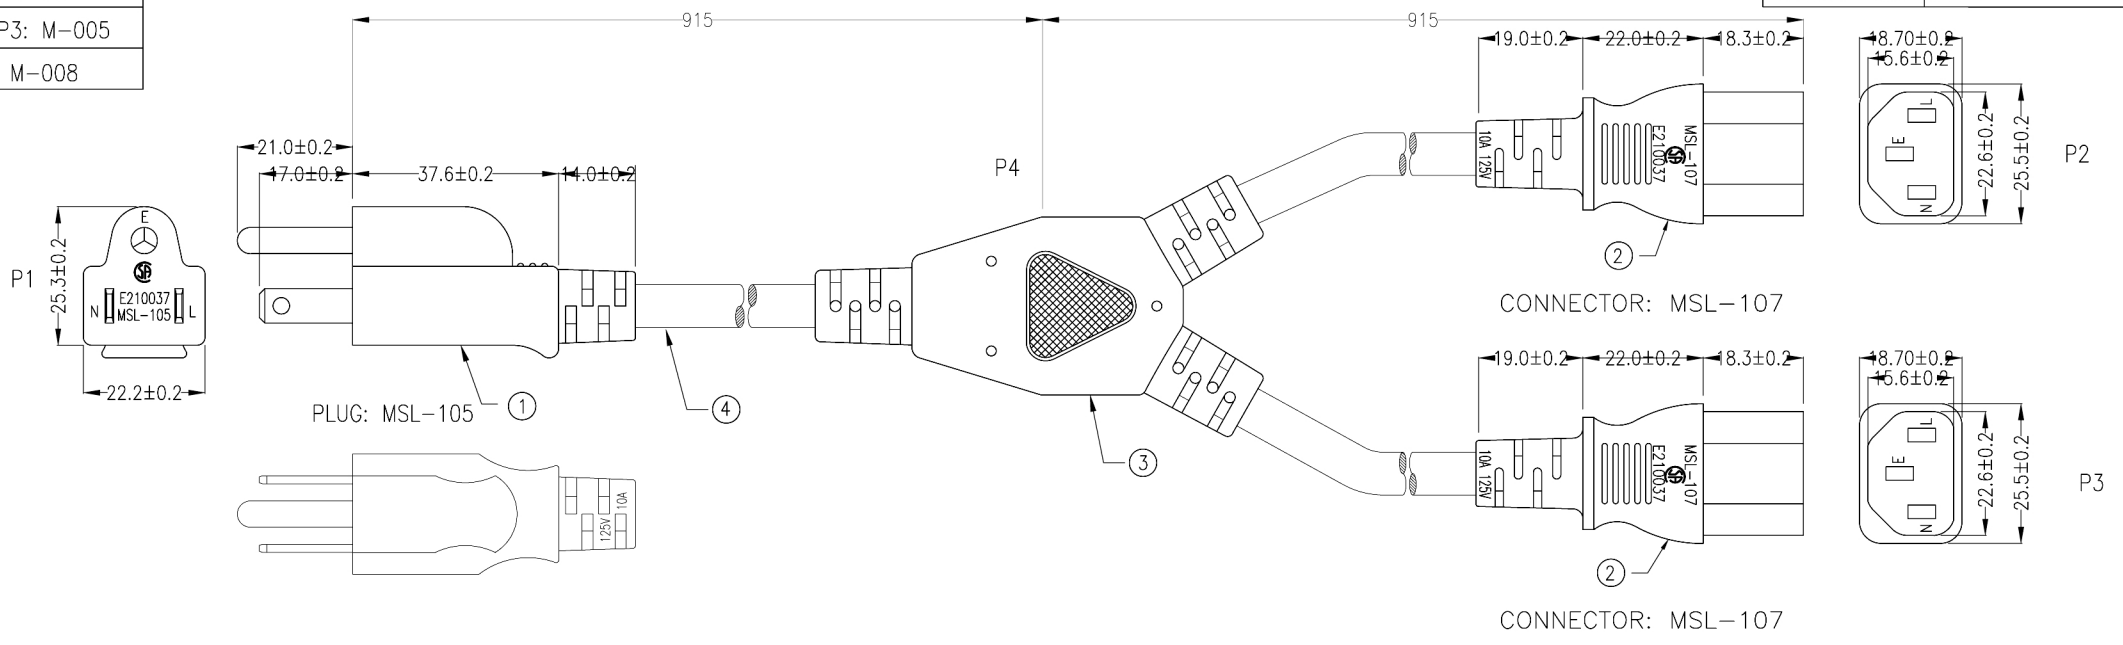


PLUG: MSL-105 ①

CONNECTOR: MSL-107 ②


CONNECTOR: MSL-107 ②




P2



P3

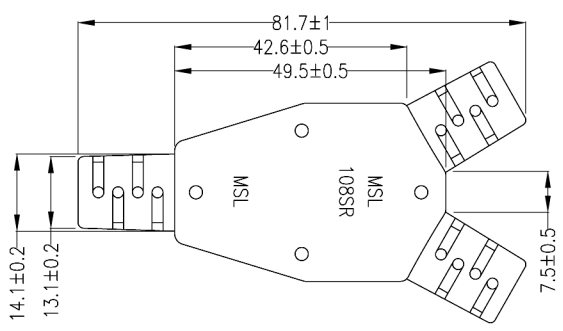

PACKING A: <3M



	P1	P2	P3
BLACK	L	L	L
WHITE	N	N	N
GREEN	E	E	E

MARKING: (UL) SJT 3/C 18AWG(0.824MM²) VW-1 75°C 300V E204978
 CSA SJT 3/C 0.824MM²(18AWG) FT2 60°C 300V 204790 MSL

P1,P2,P3: E210037

*NOTE: ALL relevant materials are complied with RoHS directive.

4	UL SJT 18AWG x 3C, OD 7.8mm, JACKET BLACK, DRAWING No. EPSVT011803C-010	H5TC05-0304K09	900mm*3	M304
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-021	A1QC18-0767	1	M767
3	TERMINAL: 96146BS-0	A1QB17-0257	3	M257
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-003	A1QC14-0767	2	M767
2	TERMINAL: 2*4mm 98744BS-0/A	A1QB24-0257	6	M257
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-002	A1QC07-0767	1	M767
1	TERMINAL: 98661BS-1	A1QB01-0257	2	M257
	TERMINAL: Ø4.75mm 321203	A1QB06-0769	1	M769

No.	DESCRIPTION			Q'TY	Supplier
APPROVED					Unless Otherwise SPEC. Tolerances: .0 ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	14/FEB/12	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	JIANG	14/FEB/12	PRODUCT NO.		UNIT: mm

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm