



# LWC050-240S240T

## DATASHEET

[View Part on Verical](#)

### Email Us

Sales: [sales@verical.com](mailto:sales@verical.com)

Support: [support@verical.com](mailto:support@verical.com)

Suppliers: [Visit our seller page](#)

### Company Address

Arrow Electronics, Inc

7459 S. Lima Street

Englewood, CO 80112-3879


This coversheet was created by Verical, a division of Arrow Electronics, Inc. ("Verical"). The attached document was created by the part supplier, not Verical, and is provided strictly 'as is.' Verical, its subsidiaries, affiliates, employees, and agents make no representations or warranties regarding the attached document and disclaim any liability for the consequences of relying on the information therein. All referenced brands, product names, service names, and trademarks are the property of their respective owners.

**FEATURES**

- High Efficiency & High Power Factor – Meets Energy Star & DLC
- 5 Year Warranty
- Over Voltage, Short Circuit & Optional Over Temperature Protection
- Class 2 Output (Some Models)
- Waterproof (IP67), Damp & Wet Location Rated (Some Models)
- Certified UL8750 & EN61347 & CE
- Wide Range Input 90-305 VAC
- RoHS Compliant

**50W Constant Current LED Driver**

**LWC050 Series**

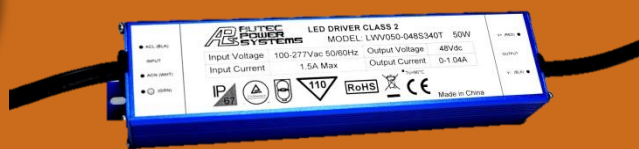

**SPECIFICATIONS**

	Model # (2)	Output Current (6)	Voltage Range(6)	PF (Min) (5)	Efficiency (Typ)		
					At 110V	At 220V	At 277V
See Part Number Builder to create your customized part	LWC050-035S1	350 mA	93~143V	0.90	89%	91%	91%
	LWC050-045S1	450 mA	72~111V	0.90	89%	91%	91%
	LWC050-054S1	540 mA	60~93V	0.90	89%	90%	91%
	LWC050-070S1	700 mA	46~71V	0.90	89%	90%	91%
	LWC050-105S3 (3)	1050 mA	31~48V	0.90	89%	90%	91%
	LWC050-140S2 (4)	1400 mA	23~36V	0.90	88%	88.5%	91%
	LWC050-167S2 (4)	1670 mA	20~30V	0.90	88%	88.5%	90.5%
	LWC050-210S2 (4)	2100 mA	16~24V	0.90	88%	88.5%	90.5%
	LWC050-240S2 (4)	2400 mA	14~21V	0.90	88%	88.5%	90.5%
	LWC050-280S2 (4)	2800 mA	12~18V	0.90	87%	88%	90.5%
	LWC050-333S2 (4)	3330 mA	10~15V	0.90	87%	88%	89%
	LWC050-417S2 (4)	4170 mA	8~12V	0.90	86.5%	87.5%	88.5%

Output	<b>Load Regulation</b>	±5%
	<b>Line Regulation</b>	±2%
	<b>Current Range</b>	±5%
	<b>Turn-on Delay</b>	2 sec. (Typ.) Measured at 110Vac input. / 1 sec. (Typ.) Measured at 220Vac input.
	<b>Ripple &amp; Noise (pk-pk)</b>	3% Vo Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1 uF ceramic capacitor and a 10 uF electrolytic capacitor
Input	<b>Input voltage</b>	100~277 Vac
	<b>Frequency Range</b>	50Hz ~60Hz
	<b>Inrush Current</b>	75A at 230Vac input, 25°C Cold Start
	<b>AC Current (Typ.)</b>	0.56 A measured at full load and 100 Vac input / 0.25 measured at full load and 220 Vac input
	<b>THD</b>	< 20% measured at 100-277 Vac, from 75% to 100% Load
	<b>Leakage Current</b>	0.25 mA Measured at 277Vac 60Hz Input
Protection	<b>Short Circuit</b>	Protection type : Hiccup mode, recovers automatically after fault condition is removed
	<b>Over Temperature</b>	110°C Maximum temperature of components inside the case (Typ). Auto recovers after cooling (Optional)
	<b>Over Voltage</b>	Latch mode, recycle AC to restart.





Environmental	Temperature Range	Operational	- 40°C ~+ 70°C (See Derating Curve)
		Storage	- 40 ~ +85°C
	Case Temperature	Max. +90 °C (See Mechanical Drawing for exact location)	
	Humidity	Operational	10% ~ 100% RH
Storage		5% ~100% R.H	
Safety & EMC	Safety Standards	UL8750, Compliance to UL1012 UL1310. CAN/CSA-C22.2 No. 223, CSA-C22.2 No. 107.1, CSA-C22.2 No. 250.0-13-12 EN61347.1, EN61347-2-13 and EN60529	
	EMI Conduction & Radiation	Meet EN55015 FCC Part 15 Class B	
	EMS Immunity	EN 61000-3-2, EN 61000-3-3, EN 61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11, EN 61547	
	Surge	EN61000-4-2 4kV contact discharge (6kV optional available)	
Others	MTBF	252,000 hours For 1400 mA output model, measured at 110V input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)	
	Lifetime	87,000 hours For 1400 mA output model, measured at 220V input, 80%Load and 45°C ambient temperature	
	Dimensions	Millimeters (L*W*H) 176.9*46.2*32.3	
	Weight	625g	

**Notes:**


1. If not specified all measurement done at full load and 230 Vac input.
2. A suffix-xxx may be added to denote variations or modifications to the base product, where x can be any alphanumeric character or blank.
3. Class 2 Output US & Canada
4. Class 2 output US
5. Minimum at 277Vac and 70% load
6. +/- 5%

**Mechanical Specification**

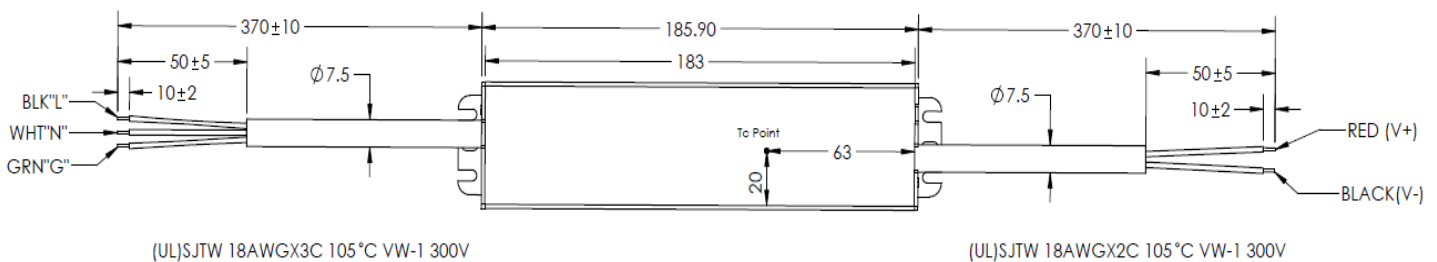


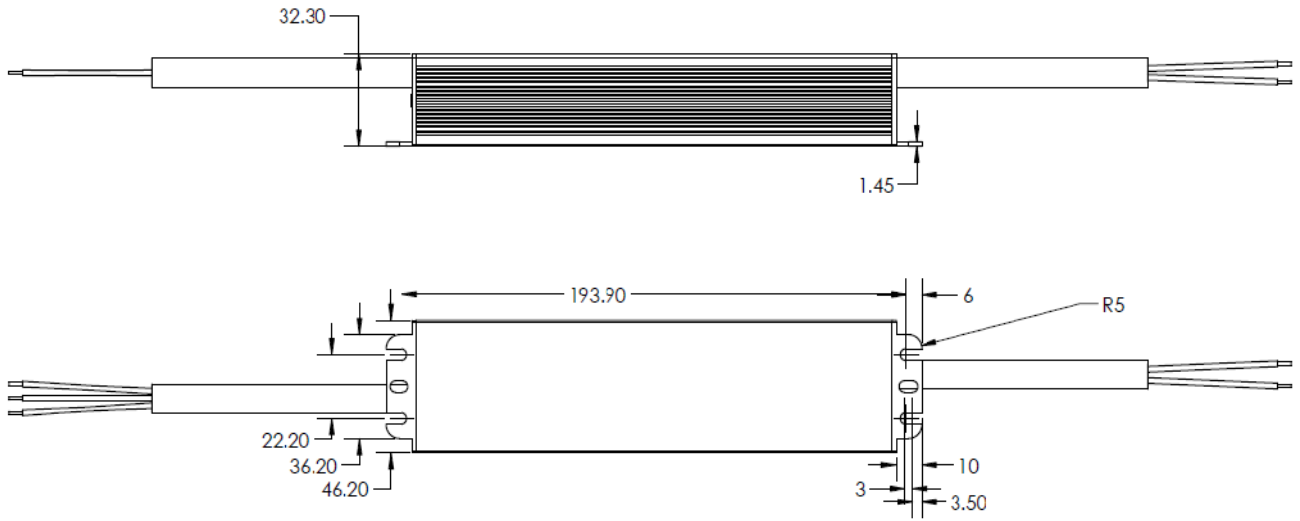

**Derating Curve**

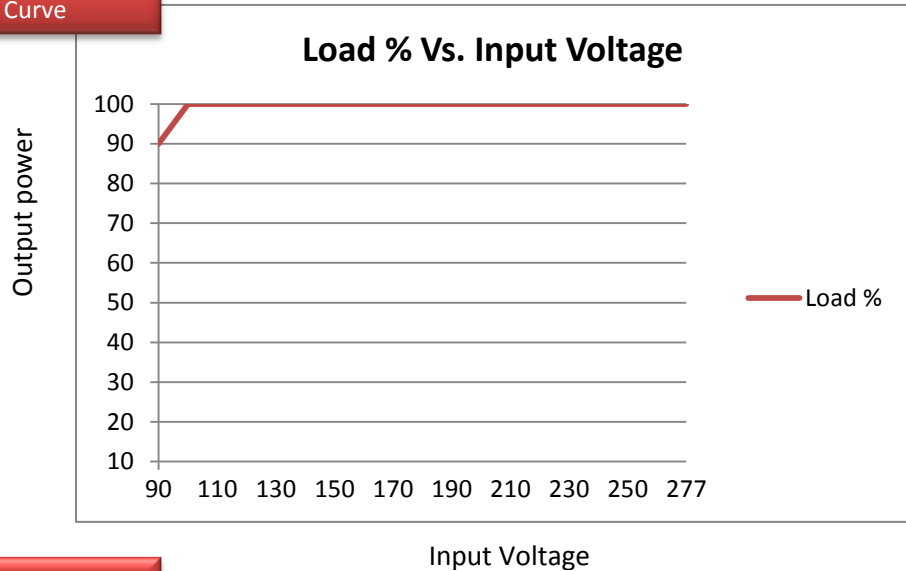


**Efficiency vs. Load**

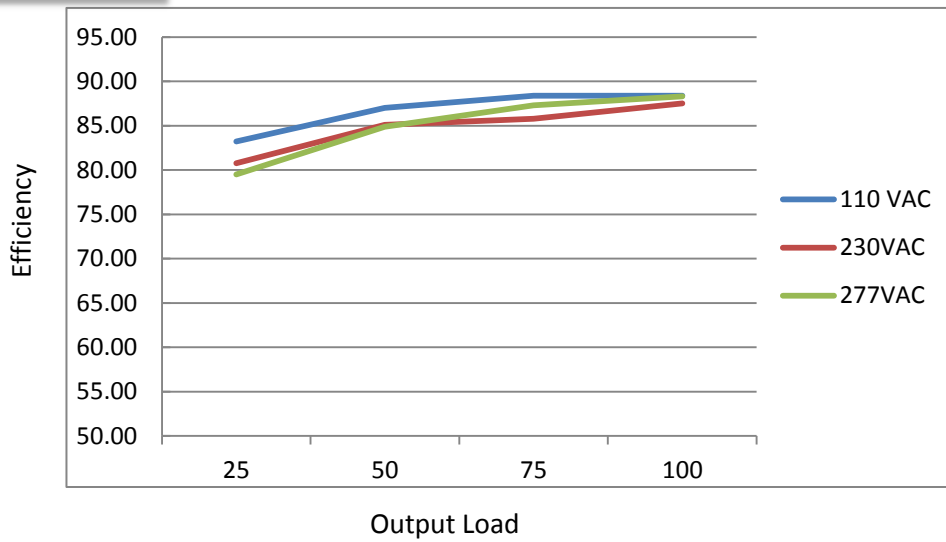


1400mA model




**Power Factor Vs. Load**

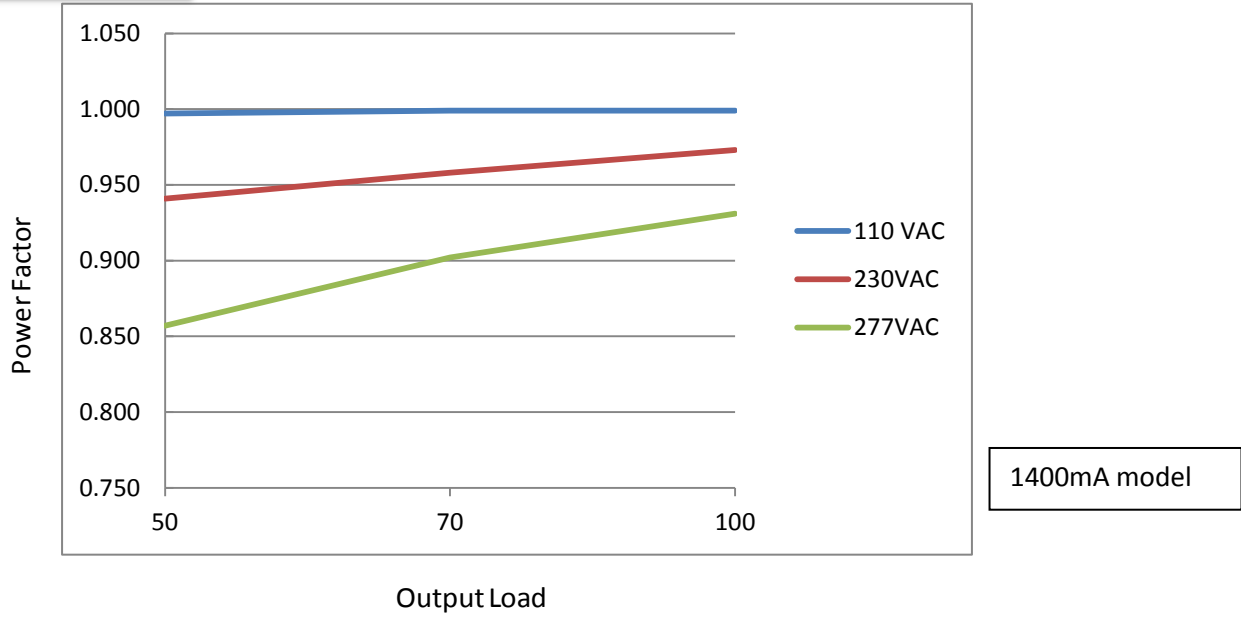


**Life Time Vs. Case Temperature**

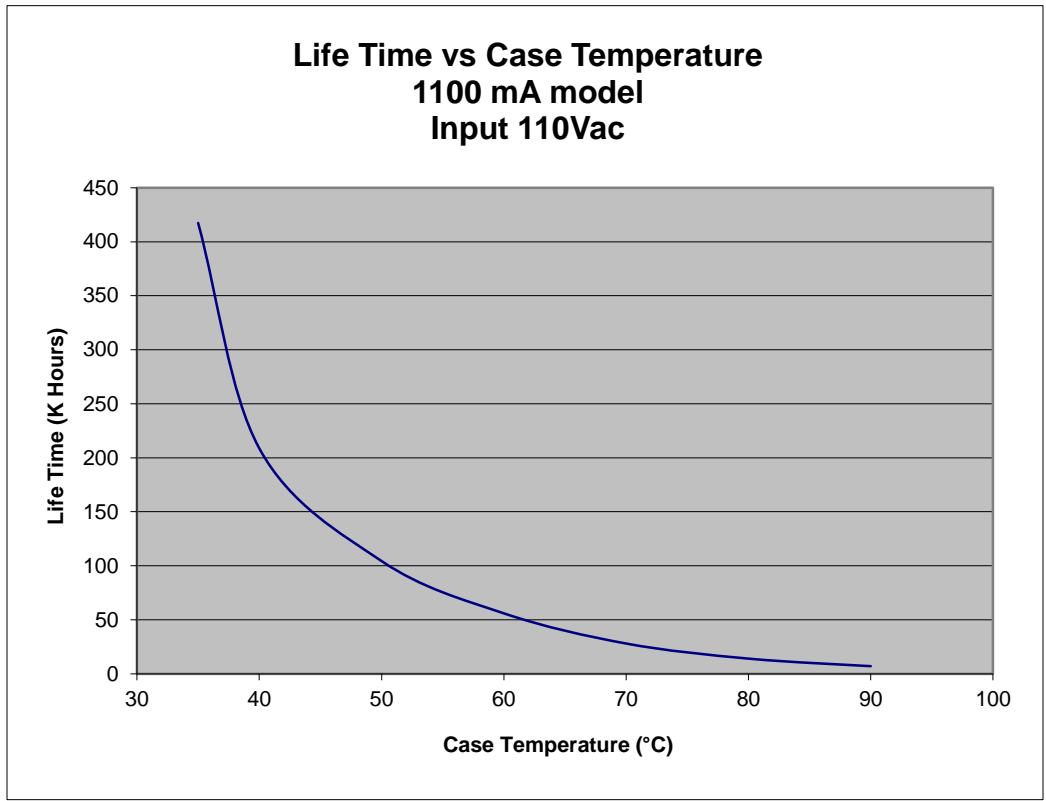

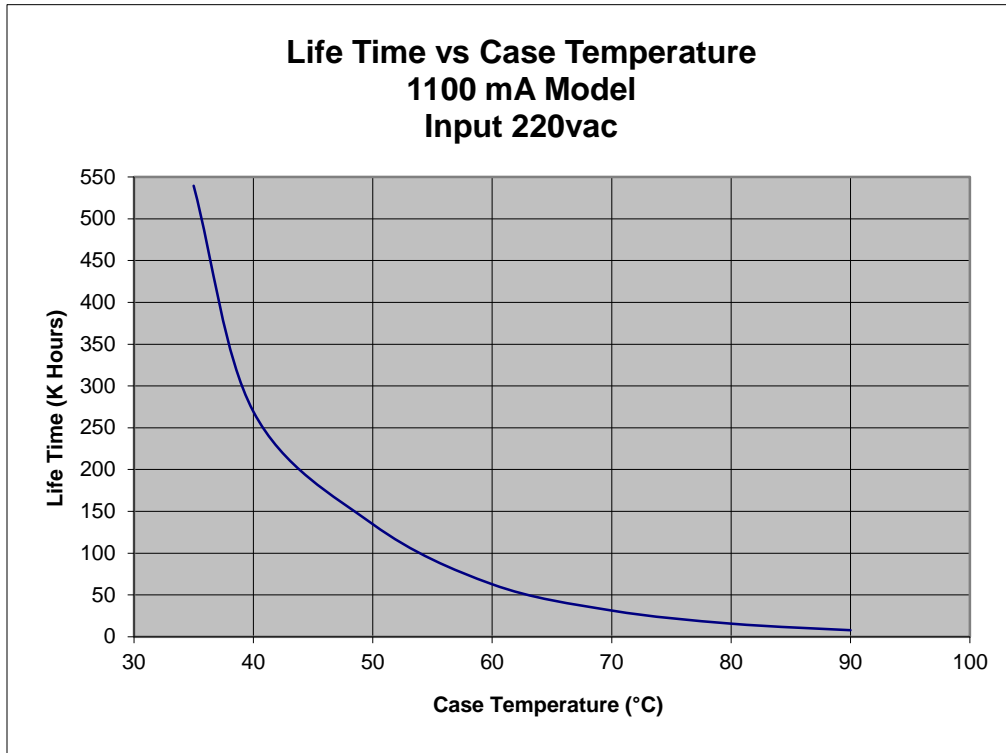

## PART NUMBER SCHEME

### LWC050-045SX4XT-XXX

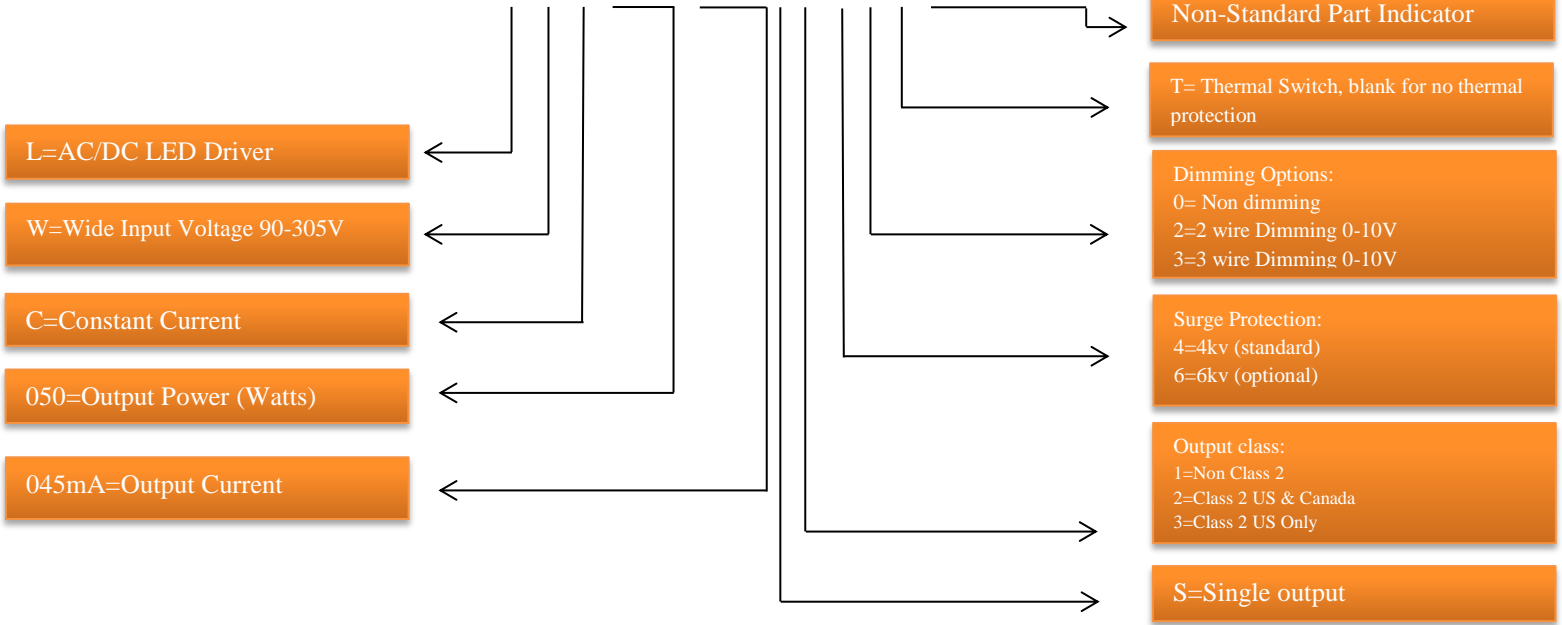

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AUTEK IS NOT RESPONSIBLE FOR ISSUES ARISING FROM ERRORS OR OMMISIONS

