


## T92T Series

- ✓ Durable, Magnetically Stabilized NBRX Sleeve-Bearing Design
- ✓ Current-Limit Protection
- ✓ Optional Open-Collector Tachometer or Locked Rotor Alarm
- ✓ Plastic Housing and Impeller Rated V-0

## Tube Axial Cooling Fans

Model	Air Flow (CFM)	Max. Static Pressure (inwg)	Operating Voltage		Operating Current (A)	Input Power (W)	Fan Speed (rpm)	Sound Pressure (dBA)	Operating Temp.		L10 Life† (hours)
			Nominal (V)	Range (V)					Min. (°C)	Max. (°C)	
T92T12MUA7-51	52	0.18	12	7.0-13.8	0.25	3.0	3100	32.0	-10	+70	45,000
T92T12MGA7-51	45	0.15	12	7.0-13.8	0.18	2.2	2700	29.0	-10	+70	—
T92T12MHA7-51	40	0.12	12	7.0-13.8	0.14	1.7	2400	25.0	-10	+70	—
T92T12MMA7-51	34	0.09	12	7.0-13.8	0.10	1.2	2050	19.5	-10	+70	—

Air flow, current, speed and sound pressure ratings are at nominal operating voltage and zero static pressure. Current and power ratings are average expected values under those conditions. † L10 bearing life expectancy at  $T_A = +40^\circ\text{C}$ . © UltraFlo is a registered trademark of Nidec Corporation.

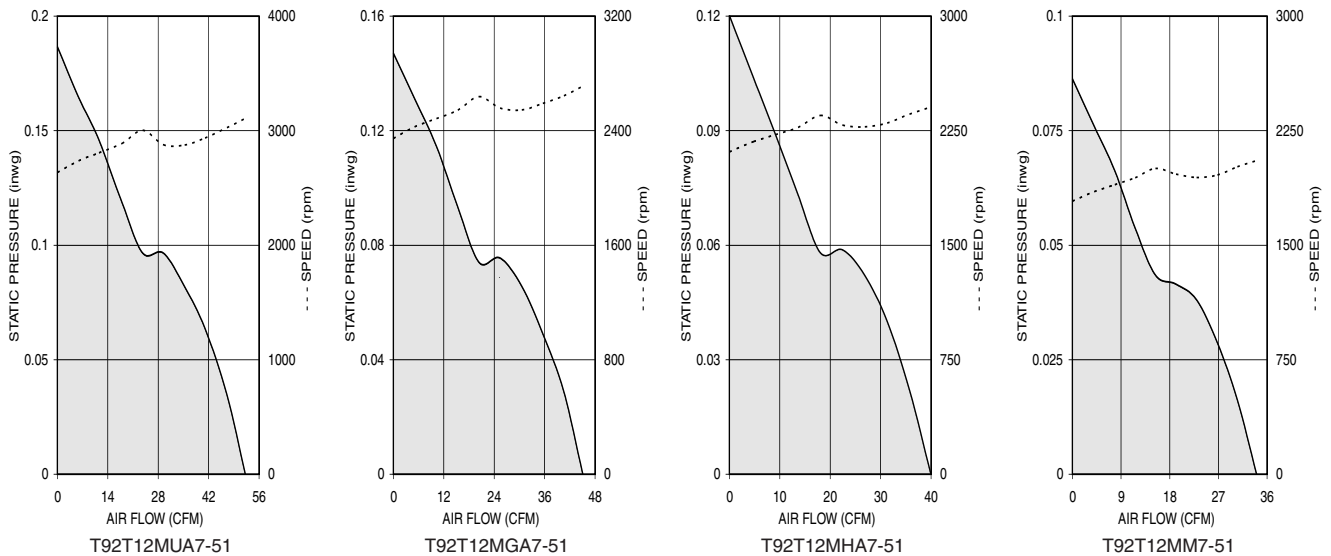

All for dreams