



General Specifications:

70x70x25mm series A

GENERAL SPECIFICATIONS

Frame Material: Plastic(UL 94V-0 and UL 94V-2)


Impeller Material: Plastic(UL 94V-0 and UL 94V-2)

Frame Type: Rib only

Bearing Type: B: Dual ball bearings

Specifications:

Item No.	Operating Voltage	Maximum Air Flow		Maximum Air Pressure		Speed	Rated Current	Input Power	Noise	Weight
	(V)	(CMM)	(CFM)	(mmAq)	(inchAq)	(rpm)	(A)	(W)	dB(A)	(g)
MG(1)7012LB-(2)25	12	0.541	19.10	2.25	0.089	2,500	0.12	1.44	28.6	74
MG(1)7012MB-(2)25	12	0.691	24.39	3.37	0.133	3,000	0.17	2.04	30.5	74
MG(1)7012HB-(2)25	12	0.828	29.22	4.65	0.183	3,600	0.22	2.64	35.3	74
MG(1)7012XB-(2)25	12	0.983	34.69	6.21	0.244	4,200	0.30	3.60	38.2	74
MG(1)7012YB-(2)25	12	1.112	39.26	7.86	0.309	4,800	0.39	4.68	41.3	74
MG(1)7012ZB-(2)25	12	1.278	45.11	9.85	0.388	5,400	0.43	5.16	44.5	74

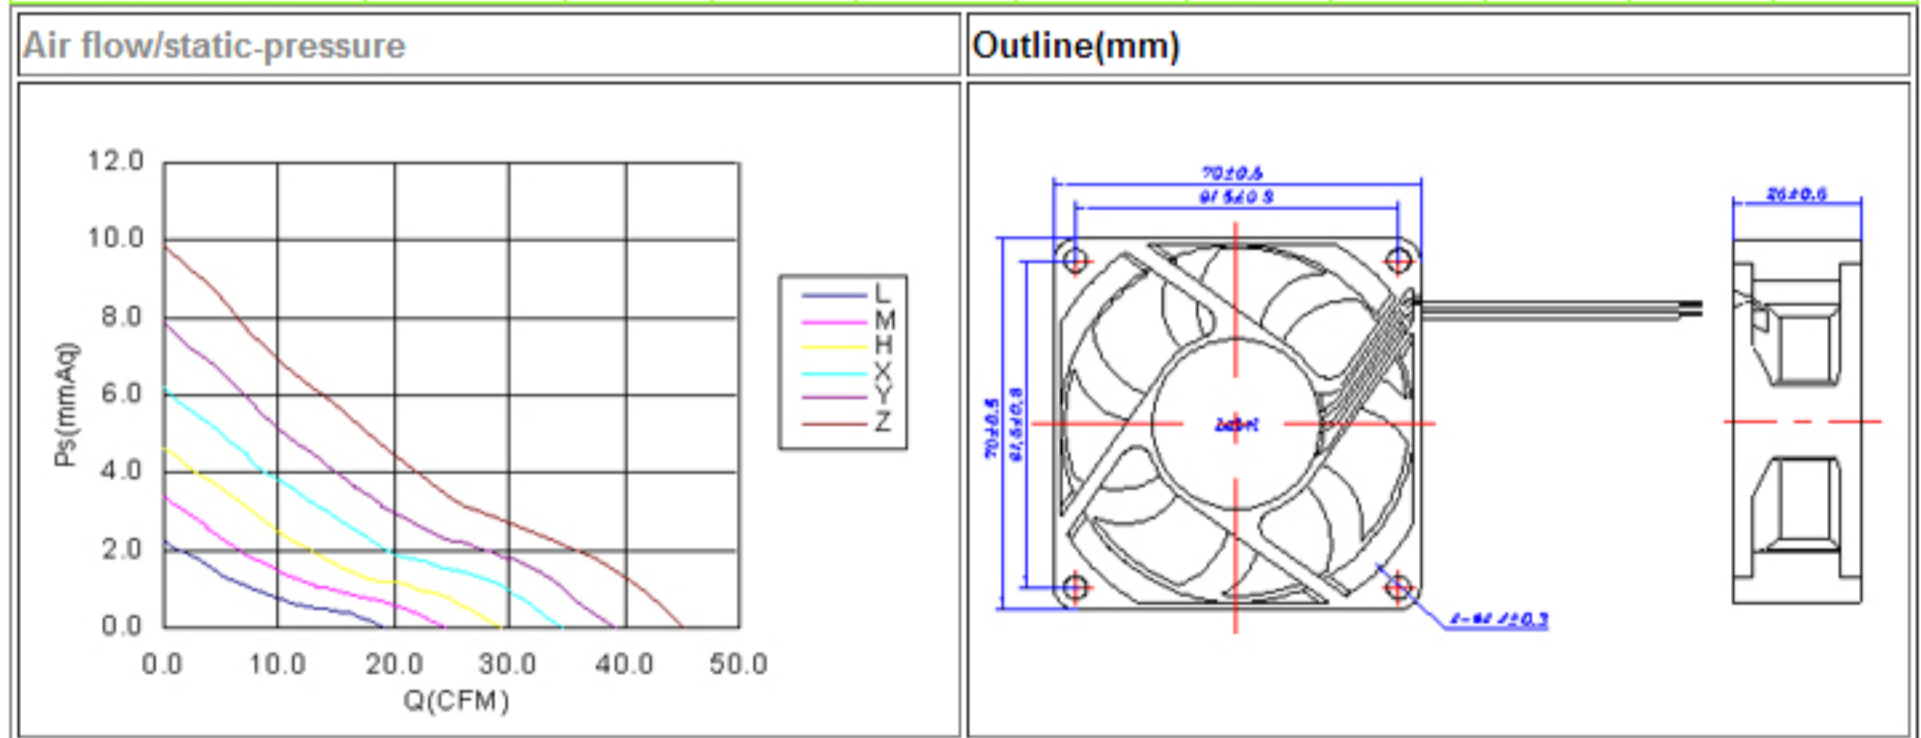

Remarks:

(1)-Electric Characteristics:

A: Standard 2-Pin; T: Frequency Generation 3-Pin or more.

(2)-Function:

A: None Automatic Restart;

O: Automatic Restart & Locked Current Protection;

R: Rotate Detection, Automatic Restart & Locked Current Protection;

S: Thermo-Control Speed, Automatic Restart & Locked Current Protection;

W: Pulse Width Modulation & Automatic Restart & Locked Current Protection (PWM).

The spec is for reference only, it's subject to change without any prior notice.